



\*ITEMNO. 5250~5300

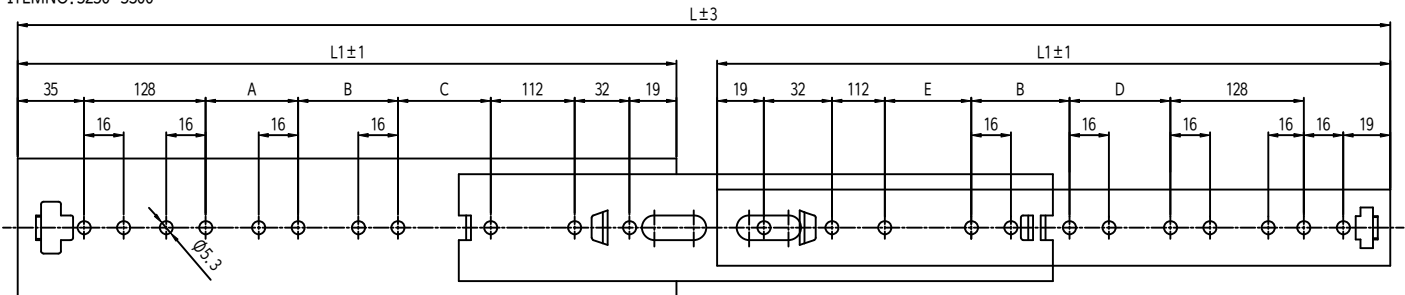

\*ITEMNO. 5350~51200

ITEMNO.	L1±1	A	B	C	D	E	L±3	Load Rating
5250	250	36			100	32	475	100kg
5300	300	86	19	32	112	70	610	97kg
5350	350			24		24	723	95kg
5400	400			74		74	826	93kg
5450	450			124		124	924	90kg
5500	500			174		78	1023	87kg
5550	550	96		128	96	128	1130	83kg
5600	600			146		146	1224	78kg
5650	650			132		132	1323	72kg
5700	700			182		182	1423	65kg
5750	750	128		232	128	232	(1530)	63kg
5800	800		64	282		282	(1630)	60kg
51000	1000			482		482	2011	40kg
51200	1200			682		682	2411	35kg

\*샘플확인후타공요망.

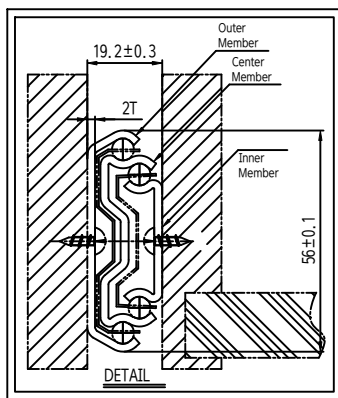

- 주요  
 1. 샘플송인독한후안할것.  
 2. 제품조립시작업자가상해물입지않도록날카로운부위를제거한다.  
 3. 지시하지않은R은자연R로한다.  
 4. 기타자세사항은설계자와협의한다.

GENERAL TOLERANCE				부품번호		명칭		수량	재질	비고
단위	A LEVEL	B LEVEL	C LEVEL	Part No.	No.	Part Name	Q'ty	Material	Remarks	
1-4	±0.07	±0.10	±0.15							
4-6	±0.07	±0.10	±0.15							
16-63	±0.10	±0.15	±0.20							
63-250	±0.15	±0.20	±0.30							
250-500	±0.20	±0.30	±0.40							
500-1000	±0.30	±0.50	±0.70							



DATE		